

The Fudakin™ External Drive LED T8 Tube is the perfect replacement for traditional fluorescent lighting. Ideal for retrofits as well as new construction, our External Drive delivers high quality LED lighting without the need of a ballast.



FEATURES

- Outstanding optical design providing efficient light source
- Extruded aluminum with anodized surface treatment helps to create a state-of-the-art heat sink
- Available in 15W(4')
- cETLus and DLC certified
- Available in ranges from 3000K-5000K CCT
- Contains no mercury
- Wide input voltage, AC120 - 277V / AC347

BENEFITS

- Saves up to 70% energy consumption compared to traditional lighting
- Easy installation
- Maintenance free
- High quality and reliability
- Even light distribution
- Long life

APPLICATIONS

- Widely used in commercial and industrial work environments, offices and manufacturing plants



Product Parameters


| Model Number | Watts | Input Voltage | Lumen Flux | CCT | CRI | Beam Angle | Warranty | Working Temperature |
|----------------------|-------|--------------------|------------|-------------------------|-----|------------|----------|---------------------|
| FDK-LT8C-XX-4-15-XXX | 15 | AC120-277 or AC347 | ≥1800lm | 3000K 4000K 5000K | ≥80 | 120° | 5 Years | -30 - 50°C |

Product Order Code

FDK-LT8C-XX-4-15-XXX

| Product Series | Style | Input Voltage of Driver | Size | Wattage | CCT | Type of Diffuser | Type of Power In |
|----------------------|------------------|--------------------------------|---------|--------------|-------------------------------------|--------------------------|------------------|
| LT8 = Linear T8 Tube | C = Ceiling Tube | 27 - AC100-277V 34 - AC347V | 4 - 4FT | 15 - 15 watt | 3 - 3000K 4 - 4000K 5 - 5000K | C - Clear F - Frosted | D - Double Side |

Product Dimensions

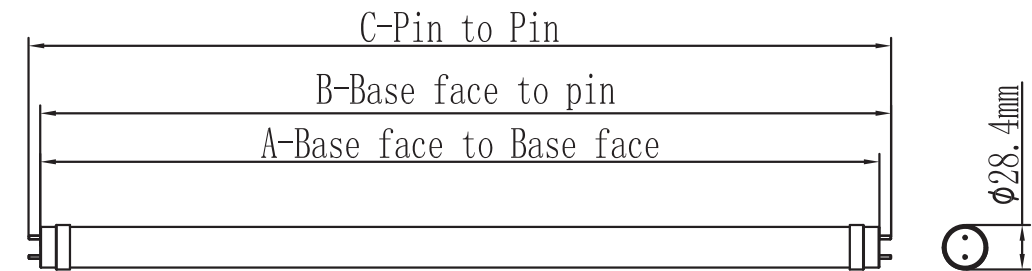

| Model | A(mm) | B(mm) | C(mm) |
|-------|--------|--------|--------|
| 4ft | 1198.4 | 1205.4 | 1212.6 |
| 3ft | 893.6 | 900.7 | 907.8 |
| 2ft | 588.8 | 595.9 | 603 |