

Premium Vertical Door Refrigeration LED Strip

Improve your refrigerated door display lighting with the Go With LED Premium Refrigeration LED Strip. This strip is designed to fit perfectly in mullion applications, with a special clip mounting option. Improve the look of your displayed product and improve your customer experience with premium colours using high CRI and High R9 colour rendering technology.



FEATURES


- Door model with integrated optical lens, provides the optimal light spread.
- Aluminum design provides optimal heat dissipation for long life and reliability.
- Shatterproof polycarbonate lens.
- Life span of more than 50,000 hours.
- Operates on remote driver (AC120-277v)
- Available in a variety of lengths.
- Available in 3000K to 5700K , Hi-Spectrum and CRI>90 and R9>70
- Saves up to 80% energy consumption compared to traditional lighting.

GO WITH LED®

Product Parameters

| MODEL | WATTS | INPUT VOLTAGE | LUMINOUS FULX | CCT | CRI | BEAM ANGLE | WARRANTY | WORKING TEMP | MATERIAL | |
|--|--------------------------------|----------------------|---------------------|-----------|-----|------------|----------|--------------|-------------------|--------------|
| DOOR GWL-AR-AL-D-1200-220-XXK-D-C95 | 22 | Driver AC100-277V | > 2490 lm | 3000K | ≥95 | 75° | 5 years | -30° - 45° C | Aluminium & PC | |
| | GWL-AR-AL-D-1500-270-XXK-D-C95 | 27 | LED Strip DC 24V | > 3115 lm | | | | | | 4000K |
| | GWL-AR-AL-D-1800-320-XXK-D-C95 | 32 | | > 3700 lm | | | | | | 5600K HSP |

Product Dimensions

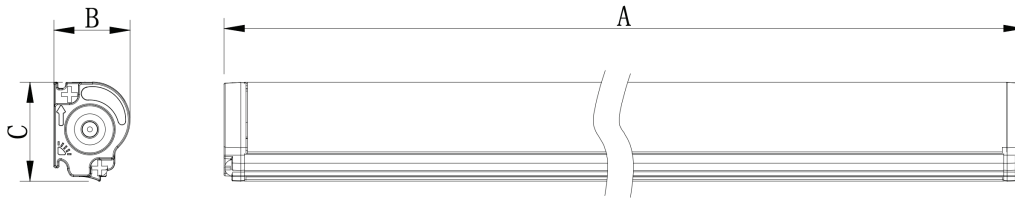

| Length | 4FT | 5FT | 6FT |
|--------|------|------|------|
| A (mm) | 1200 | 1500 | 1800 |
| B (mm) | 15 | 15 | 15 |
| C (mm) | 19.4 | 19.4 | 19.4 |



Product Order Code

| | | | | | | |
|------------|--|-----------------------------|---|---|-------------------------|--------------|
| GWL | PF | XX | PF | XXK | D | C95 |
| GWL | PRODUCT SERIES AL-R- Alumimum Door | SIZE XXXX Millimeters | WATTAGE 220- 22 watt 270 - 27 watt 320 - 32 watt | CCT 30K - 3000K 40K - 4000K 56K - 5600K HSP - Hi Spectrum | D - DOUBLE END POWER | C93- CRI >95 |



GO WITH LED[®]

Product Accessories

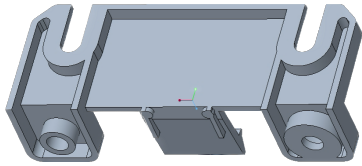

PLASTIC
MOUNTING CLIP
GWL-ALU-D-C



LED 4M CONNECTOR WIRE
GWL-DC-G4



80W, 100W, 150W LED DRIVER
FSL-LD2-XXX24V

