

# DOWN LIGHTS

10W—15W

The Fudakin™ PD2 Series Down Lights are a terrific source of light for any indoor application. Typically mounted in the ceiling, these lights provide an even distribution of light and are a perfect replacement for CFL or HID pot and down lights. Stylishly designed, yet able to withstand the test of time, the Fudakin™ PD2 Series are a great solution to your lighting needs.



## FEATURES

- Outstanding optical design providing an efficient light source
- Die casting with anodized treatment helps to create a state-of-the-art heat sink
- High lumen output is ideal for illuminating large spaces
- Attractive styling and durable
- Wide input voltage, AC100 – 277V / 347V
- Available in 20W, 50W and 90W
- High-efficiency current driver
- Contains no mercury
- cULus certified
- Aluminum shell is weather and corrosion resistant

## BENEFITS

- Saves up to 80% energy consumption compared to traditional lighting
- Easy installation
- Maintenance free
- High quality and reliability
- Long life

## APPLICATIONS

- Widely used for commercial, residential, and retail

# DOWN LIGHTS

10W—15W

## Product Parameters

MODEL	Watts	Input Voltage	Luminous Flux	CCT	CRI	Beam Angle	Warranty	Working Temp.	Material
FDK-DLJM-12-04-10-XXX-D	10	AC 120V	≥700lm	3000K 3500K 4000K 5000K	≥80	100°	5 Years	-20 - 40°C	Aluminum
FDK-DLRM-12-04-10-XXX-D	10		≥700lm						
FDK-DLJM-12-06-15-XXX-D	15		≥1050lm						
FDK-DLRM-12-06-15-XXX-D	15		≥1050lm						


## Product Order Code

FDK-DLXX-XX-X-XX


Product Series	Input Voltage	Size	Wattage	CCT
DLJM - Down Light Box Mounting	12 - AC120V	04 - 4 inch	10 - 10 watt	30K - 3000K
DLRM - Down Light Recessed Mounting		06 - 6 inch	15 - 15 watt	35K - 3500K 40K - 4000K 50K - 5000K

## Product Dimensions


FDK-DLJM-12-04-10-XXX-D

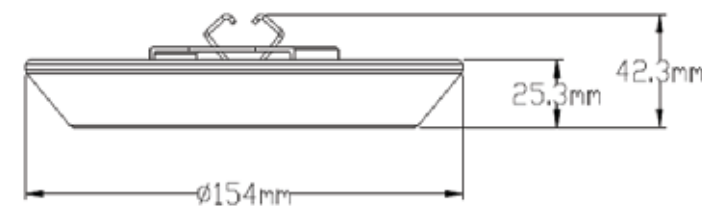

FDK-DLRM-12-04-10-XXX-D

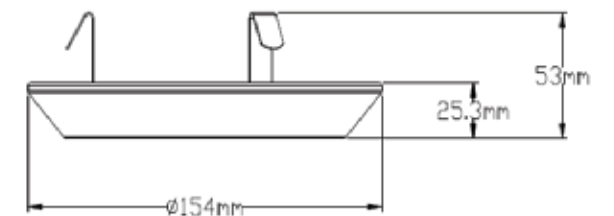

FDK-DLJM-12-06-15-XXX-D

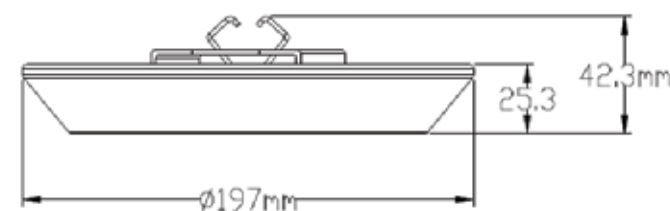

FDK-DLRM-12-06-15-XXX-D

