TUBES

Ballast Compatible

The Fudakin™ T8 Tube is ballast compatible and was engineered to quickly and efficiently replace wasteful fluorescent lamps. Installation by a certified electrician is safe and easy. With superior high efficiency, you can start enjoying years of economical, worry free illumination.







Red Tag - iTravel 2000 Head Office Mississauga, ON

FEATURES

- Outstanding optical design providing efficient light source
- Extruded aluminum with anodized surface treatment helps to create a state-of-the-art heat sink
- Available in 15W(4')
- cETLus and DLC certified
- Available in ranges from 3000K -5000K CCT
- Contains no mercury

BENEFITS


- Saves up to 70% energy consumption compared to traditional lighting
- Easy installation
- Maintenance free
- High quality and reliability
- Even light distribution
- Long life

APPLICATIONS


 Widely used in commercial and industrial work environments, offices and manufacturing plants

Product Parameters

Model Number	Watts	Input Voltage	Lumen Flux	CCT	CRI	Beam Angle	Warranty	Working Temperature	Material
FDK-LT8C-4-154FA	. 15	AC100-277V or AC100-347V	≥1800lm	3000K 4000K 5000K	≥80	120°	5 Years	-25 - 45°C	Aluminum & PC

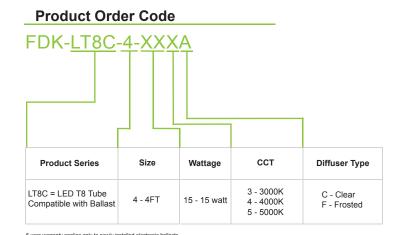

Product Dimensions

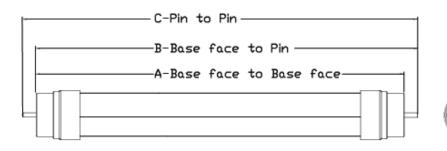

Model	A(mm)	B(mm)	C(mm)
4ft	1198.4	1205.4	1212.6
3ft	893.6	900.7	907.8
2ft	588.8	595.9	603













